

Date: Wednesday, 03/09/2008 8:52:01 AM
 User: Julie Lecocq

Process Sheet

Customer :	CU-DAR001 Dart Helicopters Services	Drawing Name :	SADDLE FITTING, AFT (OUTBOARD/INBOARD)
Job Number :	41705		
Estimate Number :	10533		
P.O. Number :		Part Number :	D2573
This Issue :	03/09/2008	S.O. No. :	
Prsht Rev. :	NC	Drawing Number :	D2573 REV E
First Issue :	//	Project Number :	N/A
Previous Run :	41589	Drawing Revision :	E
Written By :		Material :	
Checked & Approved By :	JLD 08.9.03	Due Date :	30/09/2008
Comment :	Est: 1 As Per RevE 06-01-27 JLM	Qty:	10
		Um:	Each

Additional Product

Job Number:



Seq. #:	Machine Or Operation:	Description :
----------------	------------------------------	----------------------

1.0	D6101007	Saddle Billet
-----	----------	---------------



Comment: Qty.: 1.0000 Each(s)/Unit Total : 10.0000 Each(s)
 7075-T7351 8.25X7.75X2.5
 Make from D6101-007 billet for D2573
 Ensure that grain is along 7.75" length
 Batch No: B34875

ml 08/09/15

(10)

2.0	HAAS1	HAAS CNC VERTICAL MACHINING #1
-----	-------	--------------------------------



Comment: HAAS CNC VERTICAL MACHINING #1
 Program Batch No. 41705 Double check by: DIP

- 1-Machine Step No 1 per Folio FA051 and inspect per attached Dimension Sheets
- 2-Machine Step No 2 per Folio FA051 and inspect per attached Dimension Sheets
- 3-Machine Step No 3 per Folio FA051 and inspect per attached Dimension Sheets
- 4-Deburr and remove all machining marks
- 5-Tumble to remove sharp edges.

ml / 88 08/09/17

(10)

3.0	MILLING CONV.	CONVENTIONAL MILLING MACHINE
-----	---------------	------------------------------



Comment: CONVENTIONAL MILLING MACHINE
 Machine keyway as per dwg D2573 & D2574

ml / 88 08/09/17

(10)

4.0	QC2	INSPECT PARTS AS THEY COME OFF MACHINE
-----	-----	--



Comment: INSPECT PARTS AS THEY COME OFF MACHINE

ml / 88 08/09/17

(10)

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Date: Wednesday, 03/09/2008 8:52:01 AM
User: Julie Lecocq

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: SADDLE FITTING, AFT (OUTBOARD/INBOARD)

Job Number: 41705

Part Number: D2573

Job Number:



Seq. #:

Machine Or Operation:

Description :

5.0

QC8

SECOND CHECK



Comment: SECOND CHECK

JL 08/09/21

6.0

HAND FINISHING1

HAND FINISHING RESOURCE #1



Comment: HAND FINISHING RESOURCE #1

Acid etch and Alodine as per QSI 005 4.1

M-L 08/09/22

10X

7.0

POWDER COATING

POWDER COATING



Comment: POWDER COATING

Powder Coat White Gloss (Ref: 4.3.5.1) as per QSI 005 4.3

START TIME:

OVEN TEMPERATURE:

FINISH TIME:

2:00
320
2:30

M-L 08/09/23

10X

8.0

QC3

INSPECT POWDER COAT/CHEMICAL CONVERSION



Comment: INSPECT POWDER COAT

08-09-23 10X

JL

9.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Identify and Stock

Location:

ST434 (overstock)

JL 08/09/24

10.0

QC21

FINAL INSPECTION/W/O RELEASE



Comment: FINAL INSPECTION/W/O RELEASE

08/09/24

Job Completion



W 08.09.24

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

DART AEROSPACE LTD	Work Order: 41705	
Description: Saddle, Aft Outboard	Part Number:	D2573
Inspection Dwg: D2573 Rev. E	Page 1 of 1	

Inspect dimensions highlighted on inspection sheet drawing D2573 Rev. E and record below:

Dim	Min	Max	Go/No Go Gauge	Recorded Actual Dimensions				By	Date
				1	2	3	4		
A	0.438	0.443		.438	.438	.438	.438		
B	1.745	1.755		1.750	1.750	1.750	1.750		
C	3.495	3.505		3.500	3.500	3.500	3.500		
D	1.745	1.755		1.750	1.750	1.750	1.750		
E	7.990	8.010		8.000	8.000	8.000	8.000		
F	0.490	0.510		.505	.505	.510	.510		
G	0.257	0.262		.252	.252	.258	.258		
H	0.375	0.380		.377	.377	.377	.377		
I	0.490	0.510		.500	.500	.500	.505		
J	1.174	1.184		1.178	1.178	1.178	1.178		
K	0.558	0.578		.562	.562	.568	.568		
L	1.174	1.184		1.178	1.178	1.178	1.178		
M	1.365	1.375		1.370	1.370	1.372	1.371		
N	2.495	2.505		2.500	2.500	2.500	2.500		
O	4.119	4.129		4.121	4.121	4.121	4.123		
P	0.115	0.135		.125	.125	.125	.125		
Q	0.115	0.135		.125	.125	.135	.135		
R	0.240	0.260		.251	.251	.254	.254		
S	0.115	0.135		.125	.125	.125	.126		
T	0.178	0.198		.188	.188	.188	.188		
U	3.210	3.250		3.230	3.230	3.230	3.234		
V	0.230	0.250		.241	.241	.240	.240		
W	0.115	0.135		.125	.125	.125	.125		
X	0.308	0.313		.313	.313	.310	.310		
Y	0.760	0.765		.760	.760	.760	.760		
Z	0.352	0.372		.363	.363	.367	.367		
AA	0.470	0.530		.500	.500	.500	.500		
AB	0.615	0.635		.625	.625	.625	.625		
AC	0.053	0.073		.063	.063	.063	.063		
AD	0.240	0.260		.250	.250	.250	.250		
AE	1.500	1.520		1.511	1.511	1.511	1.511		
AF	0.115	0.135		.125	.125	.125	.125		
AG	0.240	0.280		.260	.260	.260	.260		
AH	0.240	0.260		.250	.250	.250	.250		
AI	2.000	2.020		2.004	2.004	2.004	2.004		
AJ	0.023	0.043		.033	.033	.033	.033		
Accept/Reject									

Measured by: <i>SL</i>
Date: 08/09/21

Audited by: <i>JL</i>
Date: 08/09/21

Rev	Date	Change	Revised by	Approved
A		New Issue	RF	
B	02.09.26	Re-format; Added Rev. D	KJ	
C	02.10.11	Re-format; Added DT8682, DT8683, DT8684	KJ	
D	05.05.05	Added dimension AI	KJ/RF	
E	05.12.05	Added dimension AJ	KJ/JLM	


DART AEROSPACE LTD	Work Order:	41705
Description: Saddle, Aft Outboard	Part Number:	D2573
Inspection Dwg: D2573 Rev. E		Page 1 of 1

Inspect dimensions highlighted on inspection sheet drawing D2573 Rev. E and record below:

				Recorded Actual Dimensions				By	Date
Dim	Min	Max	Go/No Go Gauge	5	76	57	48		
A	0.438	0.443		.435	.438	.439	.439		
B	1.745	1.755		1.750	1.750	1.750	1.750		
C	3.495	3.505		3.500	3.500	3.500	3.500		
D	1.745	1.755		1.750	1.750	1.750	1.750		
E	7.990	8.010		8.002	8.000	8.000	8.006		
F	0.490	0.510		.500	.510	.504	.502		
G	0.257	0.262		.258	.258	.258	.259		
H	0.375	0.380		.377	.377	.377	.377		
I	0.490	0.510		.500	.501	.501	.503		
J	1.174	1.184		1.178	1.178	1.178	1.179		
K	0.558	0.578		.568	.569	.567	.570		
L	1.174	1.184		1.178	1.178	1.178	1.177		
M	1.365	1.375		1.370	1.369	1.369	1.369		
N	2.495	2.505		2.500	2.500	2.500	2.499		
O	4.119	4.129		4.121	4.121	4.122	4.122		
P	0.115	0.135		.125	.127	.127	.127		
Q	0.115	0.135		.135	.135	.135	.135		
R	0.240	0.260		.250	.252	.251	.252		
S	0.115	0.135		.125	.116	.121	.129		
T	0.178	0.198		.188	.188	.188	.188		
U	3.210	3.250		3.232	3.230	3.230	3.230		
V	0.230	0.250		.241	.236	.236	.236		
W	0.115	0.135		.125	.126	.127	.126		
X	0.308	0.313		.310	.311	.311	.311		
Y	0.760	0.765		.760	.762	.760	.760		
Z	0.352	0.372		.362	.369	.369	.367		
AA	0.470	0.530		.500	.506	.500	.500		
AB	0.615	0.635		.625	.633	.635	.634		
AC	0.053	0.073		.063	.063	.063	.063		
AD	0.240	0.260		.250	.242	.245	.246		
AE	1.500	1.520		1.518	1.518	1.518	1.514		
AF	0.115	0.135		.125	.127	.129	.127		
AG	0.240	0.280		.250	.260	.265	.265		
AH	0.240	0.260		.250	.247	.247	.247		
AI	2.000	2.020		2.003	2.003	2.003	2.004		
AJ	0.023	0.043		.033	.033	.033	.033		
Accept/Reject									

Measured by: <i>[Signature]</i>	Audited by: <i>J.L.</i>
Date: 08/09/17	Date: 08/09/21

Rev	Date	Change	Revised by	Approved
A		New Issue	RF	
B	02.09.26	Re-format; Added Rev. D	KJ	
C	02.10.11	Re-format; Added DT8682, DT8683, DT8684	KJ	
D	05.05.05	Added dimension AI	KJ/RF	
E	05.12.05	Added dimension AJ	KJ/JLM	<i>[Signature]</i>

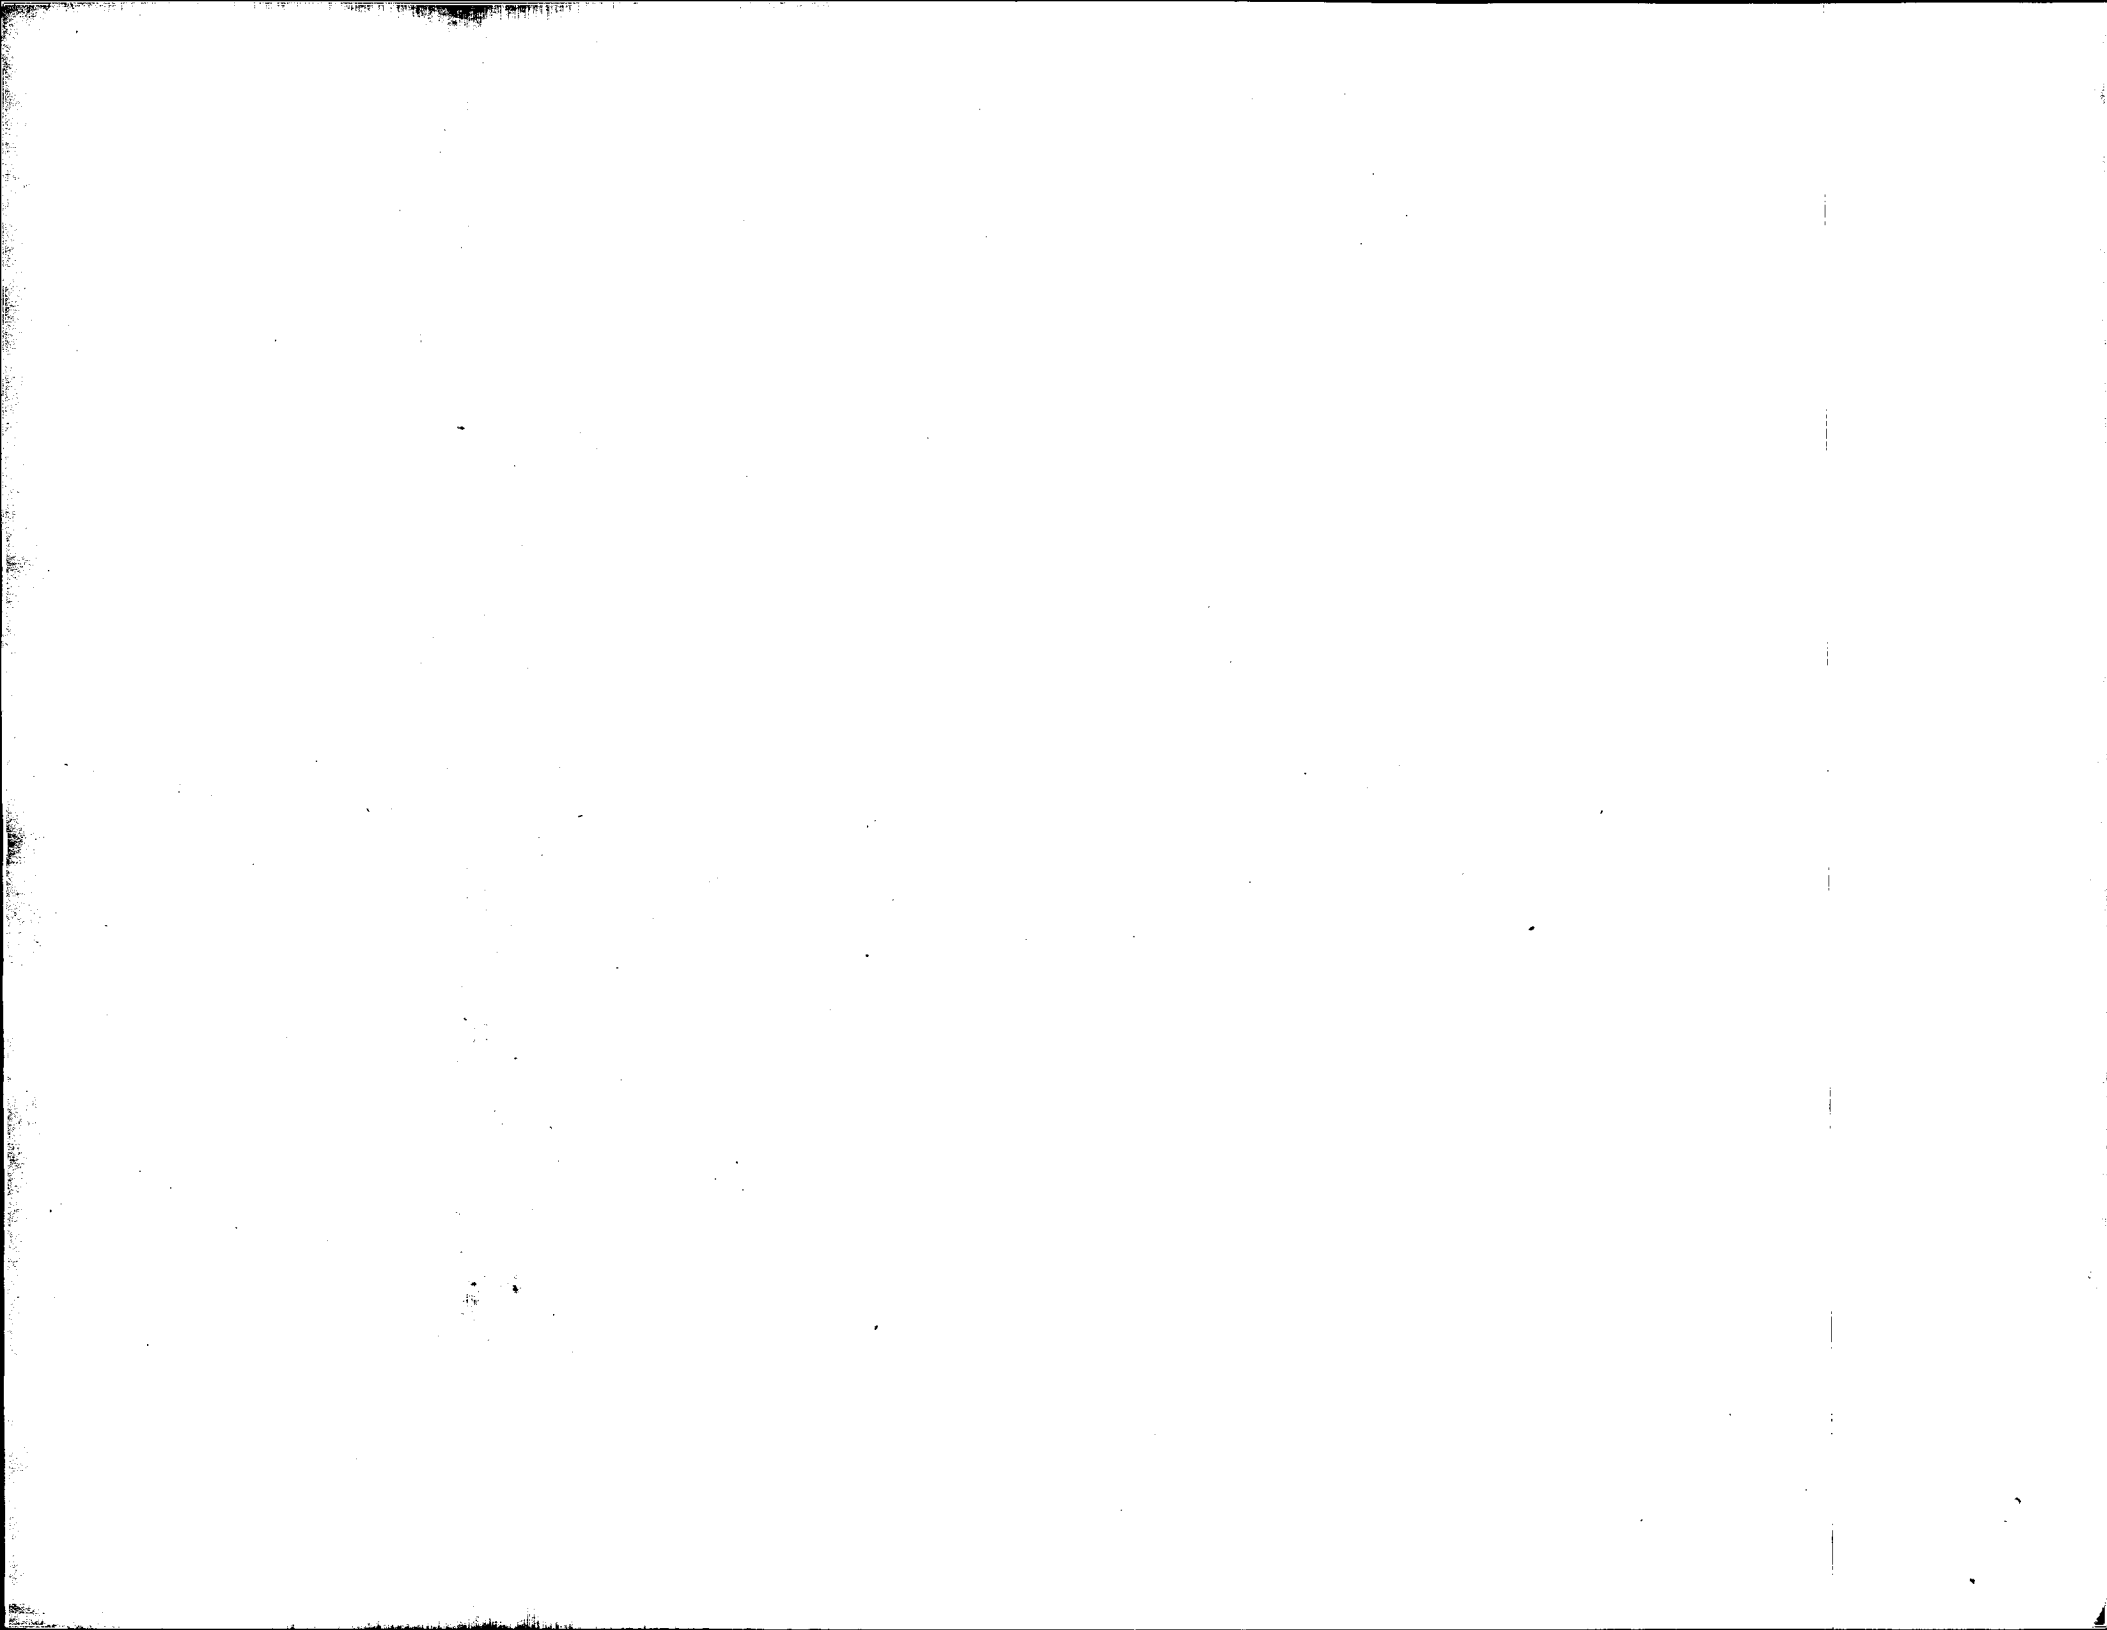

DART AEROSPACE LTD	Work Order: 41705
Description: Saddle, Aft Outboard	Part Number: D2573
Inspection Dwg: D2573 Rev. E	Page 1 of 1

Inspect dimensions highlighted on inspection sheet drawing D2573 Rev. E and record below:

				Recorded Actual Dimensions					
Dim	Min	Max	Go/No Go Gauge	1	2	3	4	By	Date
A	0.438	0.443		.438	.439				
B	1.745	1.755		1.750	1.750				
C	3.495	3.505		3.500	3.500				
D	1.745	1.755		1.750	1.750				
E	7.990	8.010		8.000	8.000				
F	0.490	0.510		.503	.503				
G	0.257	0.262		.259	.259				
H	0.375	0.380		.377	.377				
I	0.490	0.510		.503	.503				
J	1.174	1.184		1.176	1.179				
K	0.558	0.578		.570	.570				
L	1.174	1.184		1.179	1.179				
M	1.365	1.375		1.369	1.369				
N	2.495	2.505		2.499	2.500				
O	4.119	4.129		4.122	4.122				
P	0.115	0.135		.127	.127				
Q	0.115	0.135		.135	.135				
R	0.240	0.260		.252	.251				
S	0.115	0.135		.129	.129				
T	0.178	0.198		.188	.188				
U	3.210	3.250		3.236	3.236				
V	0.230	0.250		.238	.246				
W	0.115	0.135		.126	.127				
X	0.308	0.313		.311	.311				
Y	0.760	0.765		.761	.761				
Z	0.352	0.372		.366	.366				
AA	0.470	0.530		.500	.500				
AB	0.615	0.635		.633	.634				
AC	0.053	0.073		.063	.063				
AD	0.240	0.260		.252	.248				
AE	1.500	1.520		1.513	1.513				
AF	0.115	0.135		.128	.128				
AG	0.240	0.280		.262	.262				
AH	0.240	0.260		.250	.250				
AI	2.000	2.020		2.001	2.001				
AJ	0.023	0.043		.033	.033				
Accept/Reject									


Measured by: <i>me</i>
Date: 08/09/18

Audited by: <i>JL</i>
Date: 08/09/21

Rev	Date	Change	Revised by	Approved
A		New Issue	RF	
B	02.09.26	Re-format; Added Rev. D	KJ	
C	02.10.11	Re-format; Added DT8682, DT8683, DT8684	KJ	
D	05.05.05	Added dimension AI	KJ/RF	
E	05.12.05	Added dimension AJ	KJ/JLM	<i>[Signature]</i>

RELEASED

05.12.06

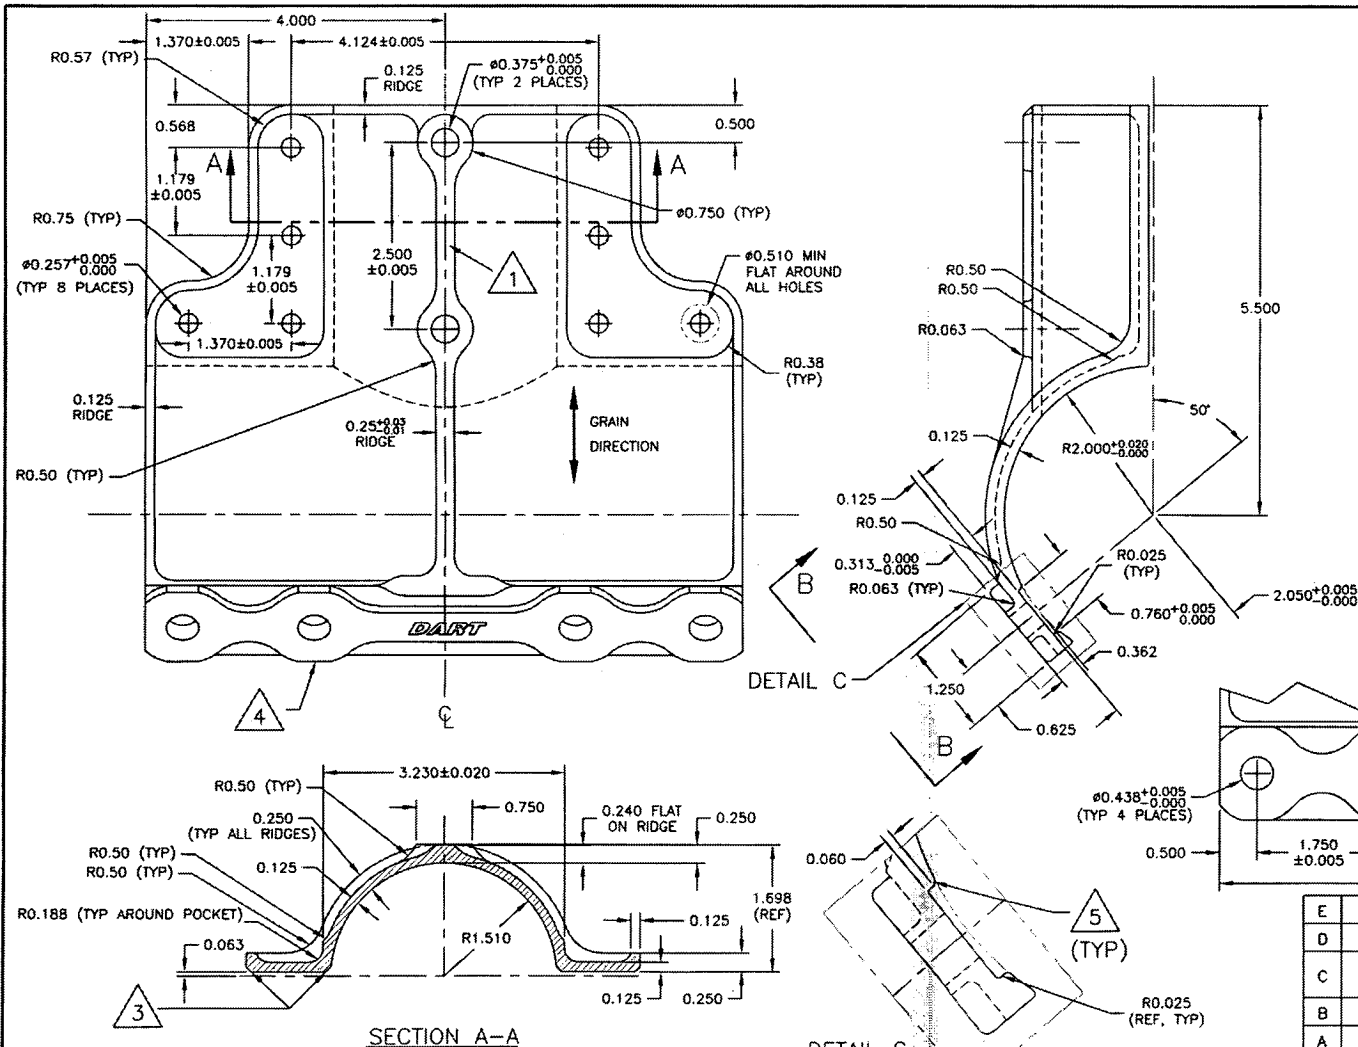


NOTES

MATERIAL: 7075-T7351 (QQ-A-250/12)
 (REF DART SPEC. D6102-001)
 FINISH: ACID ETCH, ALODINE PER DART QSI 005 4.1
 POWDER COAT GLOSS WHITE (REF 4.3.5.1) PER
 DART QSI 005 4.3
 BREAK ALL SHARP EDGES 0.010 TO 0.020
 TOLERANCES ARE PER DART QSI 018 UNLESS OTHERWISE NOTED

- 1 ENGRAVE PART AND BATCH NUMBER IN THIS AREA TO MAX DEPTH OF 0.010
- 2 ENGRAVE DART LOGO TO MAX DEPTH OF 0.015 WITH MIN RAD 0.125
- 3 CHAMFER 0.063" x 45° AROUND THIS SURFACE (TYPICAL 2 PLACES)
- 4 CHAMFER 0.063" x 45° ALL AROUND
- 5 CHAMFER 0.033" x 45° (SEE DETAIL C)

VIEW B-B

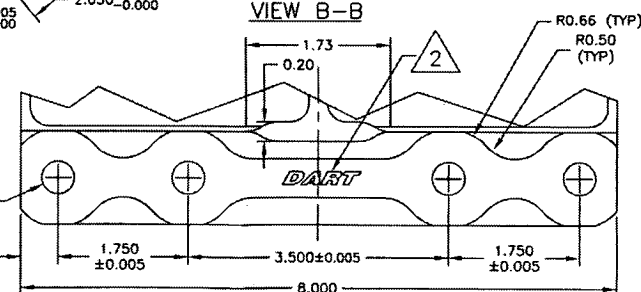

E	05.07.13	ADD CHAMFER ON RIDGE NOTE 5
D	02.09.06	ADD RIDGES; TIGHTEN TOLERANCES
C	99.10.22	INCRP. DEO 9123/9079/9102 ADD DIMENSIONS PER TSR A1177
B	96.12.02	ADD GRAIN DIR., 0.438 WAS 0.425
A	96.09.16	NEW ISSUE

DESIGN	DS	DRAWN BY	PH	DART	DART AEROSPACE LTD. MARKHAM, ONTARIO, CANADA
CHECKED	#	APPROVED	#	DRAWING NO.	D2573
DATE	05.07.13	TITLE	OUTER AFT SADDLE	REV. E	SHEET 1 OF 1
		SCALE	2:3		

COPYRIGHT © 2005 BY DART AEROSPACE LTD.

THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL
 AND IS SUPPLIED ON THE EXPRESS CONDITION
 THAT IT IS NOT TO BE USED FOR ANY PURPOSE
 OR COPIED OR COMMUNICATED TO ANY OTHER
 PERSON WITHOUT WRITTEN PERMISSION FROM
 DART AEROSPACE LTD.

SHOP COPY
 RETURN TO
 ENGINEERING
 UNCONTROLLED COPY
 SUBJECT TO AMENDMENT
 WITHOUT NOTICE
 WORK ORDER
 NO. 4775

DETAIL C
 SCALE 4:3